


Type FD

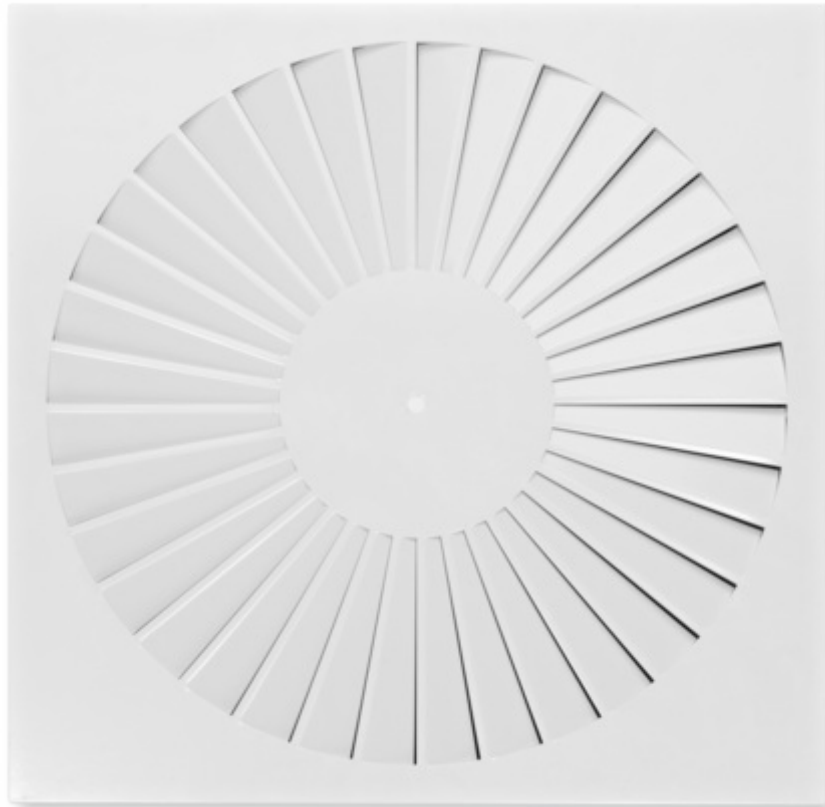

FOR COMFORT ZONES, WITH FIXED AIR CONTROL BLADES

Circular and square ceiling swirl diffusers that create high induction levels, for high room air change rates

- Nominal sizes 300, 400, 500, 600, 625
- Volume flow rate range 9 – 235 l/s or 31 – 846 m³/h
- Diffuser face made of galvanised sheet steel, powder-coated
- For supply and extract air
- For variable and constant volume flows
- For all types of ceiling systems, and with an extended border also suitable for freely suspended installation
- High induction results in a rapid reduction of the temperature difference and airflow velocity
- Air change rates of up to 35 per hour can be achieved by arranging several diffusers in a row with a minimum pitch of 0.9 m (centre line to centre line)
- Ideal for comfort zones

Optional equipment and accessories

- Exposed diffuser face available in RAL CLASSIC colours
- Plenum box with cord-operated damper blade and pressure tap



Application

- Type FD ceiling swirl diffusers are used as supply air or extract air diffusers for comfort zones
- Attractive design element for building owners and architects with demanding aesthetic requirements
- Horizontal swirling supply air discharge for mixed flow ventilation
- The efficient swirl creates high induction levels, thereby rapidly reducing the temperature difference and airflow velocity (supply air variant)
- For variable and constant volume flows
- For supply air to room air temperature differences from -12 to $+10$ K
- For room heights up to 4 m (lower edge of suspended ceiling)
- For all types of ceiling systems
- With an extended border also suitable for freely suspended installation (supply air variant)

Special characteristics

- High induction results in a rapid reduction of the supply air to room air temperature difference and airflow velocity
- For all types of ceiling systems, and with an extended border also suitable for freely suspended installation
- Horizontal or vertical duct connection
- Air change rates of up to 35 per hour can be achieved by arranging several diffusers in a row with a minimum pitch of 0.9 m (centre line to centre line)

Nominal sizes

- 300, 400, 500, 600, 625

Variants

- FD-Q: Square diffuser face
- FD-R: Circular diffuser face
- FD-*-Z: Supply air
- FD-*-A: Extract air

Connection

- H: Horizontal duct connection
- V: Vertical duct connection

Parts and characteristics

- Circular or square diffuser face
- Diffuser face with radially arranged fixed air control blades
- Plenum box for supply air, with an optimised equalising element that ensures a uniform airflow through the diffuser face
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)

Attachments

- M: Damper blade for volume flow rate balancing
- MN: Pressure tap and cord-operated damper blade for volume flow rate balancing with the diffuser face in place

Accessories

- Lip seal

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

Materials and surfaces

- Diffuser face made of galvanised sheet steel
- V, H: Plenum box and cross bar made of galvanised sheet steel
- X: Plenum box made of plastic and galvanised sheet steel
- Lip seal made of rubber
- Diffuser face powder-coated RAL 9010, pure white
- P1: Powder-coated, RAL CLASSIC colour

Standards and guidelines

- Sound power level of the air-regenerated noise measured according to EN ISO 5135

Maintenance

- Maintenance-free as construction and materials are not subject to wear
- Inspection and cleaning to VDI 6022

TROX INDIA PRIVATE LIMITED



TROX India Pvt Ltd.
Unit No. 751,
5th Floor, Bldg. No. 7,
Solitaire Corporate Park,
Andheri (E), Mumbai-400093
Phone: +91 (0) 22 6775-1600
Fax: +91 (0) 226775-1613

Online-Services

> [Your contact partner](#)

> [Online fault report](#)

> [Locations India](#)

Service-Hotlines

Main Office

Phone: +91 (0) 22 6775-1600

Fax: +91 (0) 226775-1613

TROX IN SOCIAL WEB
